

MLINK

CLOSE THE COMMUNICATION GAP




SCAN FOR MORE

Close the communication gap. For data loggers, industrial automation, SCADA, and embedded systems in rugged environments. An MLink turns any beadedstream Digital Temperature Cable (DTC) into a Modbus or JSON node. MLinks are molded in-line with DTCs at the factory. Use an MLink for the most rugged and space-constrained protocol conversion needs.

MLINK

SPECIFICATIONS

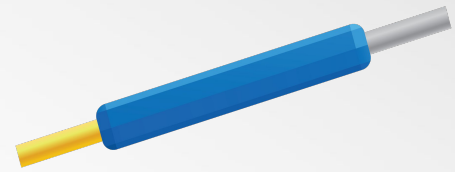

Module Version	<ul style="list-style-type: none"> In-line DTC Node
Protection Class	<ul style="list-style-type: none"> IP68
Embedded Controller	<ul style="list-style-type: none"> Low-power, high performance, industrial microcontroller Multi-thread custom embedded OS Plug & Play configuration
Protocols	<ul style="list-style-type: none"> Modbus ASCII Modbus RTU JSON
Physical Layer	<ul style="list-style-type: none"> RS-485
Wiring Interface	<ul style="list-style-type: none"> RS485-A RS485-B Power Ground
LEDs	<ul style="list-style-type: none"> Red - Status Green - Activity
Power	<ul style="list-style-type: none"> 6 to 15 VDC (max) input Idle Current: 4 mA typical Active Current: 70mA + 1mA per sensor typical (200mA max)
Configurable Baud Rate	<ul style="list-style-type: none"> 1,200 to 115,200 bps
Operating Range	<ul style="list-style-type: none"> -40° C to +85° C (-40° F to +185° F)
Outer Jacket & Node Construction	<ul style="list-style-type: none"> Polyurethane for low-temperature flexibility Optional armored feature with proven resistance to wildlife UV stabilized. Cut and abrasion resistant.
Dimensions	<ul style="list-style-type: none"> 90mm (3.54in) (length) x 15mm (0.59in) (diameter)